

Booster Coils

Duct-mounted reheat coils which are used in general heating applications. Booster coils are provided with a variety of casing configurations including fully flanged, slip and drive or end plates only.

BOOSTER COIL CONSTRUCTION

Tubing	3/8" or 1/2" O.D. Copper, 5/8" O.D. Copper, Cupronickel, Stainless Steel, Carbon Steel or Admiralty Brass
Type	Single or Double
Rows	1, 2
Fin Surface	Sine Wave (corrugated), New Ripple (peak and valley) or Flat
Casing	Galvanized Steel, Stainless Steel, Carbon Steel, Copper or Aluminum
Connections	Copper Sweat, Carbon Steel or Stainless Steel
Vents & Drains	1/8" Dole Vent & Drain

Customer _____ Customer P.O. Number _____

Job _____

Written by _____ Date _____

Approved by _____ Date _____

#	TAG	QTY	MODEL NUMBER						FIG#	CASING
			TYPE	FPI	ROWS DEEP	FIN	FH	FL		
1										
2										
3										
4										

#	DIMENSIONAL DATA												
	CONNECTION								FLANGES				W
	SIZE	A	C	E	H	I	L	M	R	S	T		
1													
2													
3													
4													





GENERAL OPTIONS	
<input type="checkbox"/>	Label Kit
<input type="checkbox"/>	Mounting Holes
<input type="checkbox"/>	Phenolic Coating
<input type="checkbox"/>	0.125" Dole Vent & Drain

CONN. OPTIONS	
<input type="checkbox"/>	FPT
<input type="checkbox"/>	0.75"
<input type="checkbox"/>	1"

MATERIALS OF CONSTRUCTION				
FIN S	AL	CU	CS	St Stl
TUBES	CU	CuNi	CS	St Stl

MATERIALS OF CONSTRUCTION				
CONN	Cu Sweat	CS	St Stl	Wrot Cu
CASING	AL	Galvanized Steel		
	CU	Stainless Steel		

REMARKS:

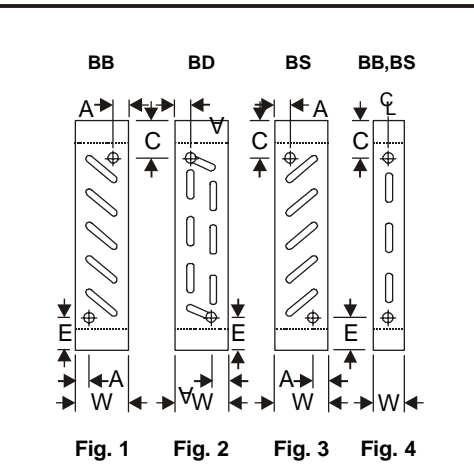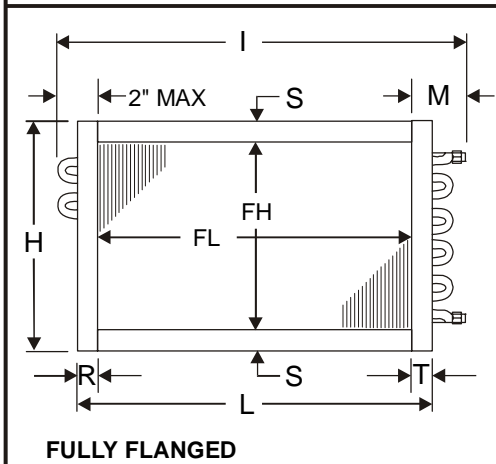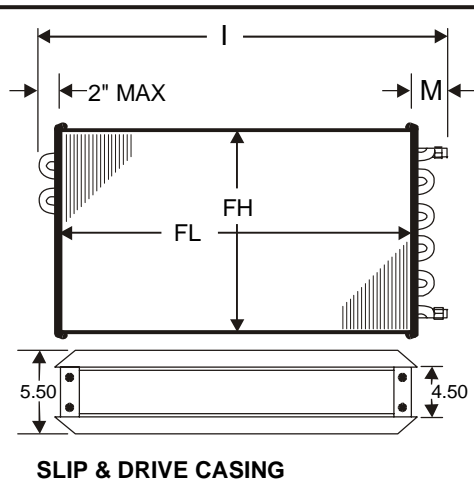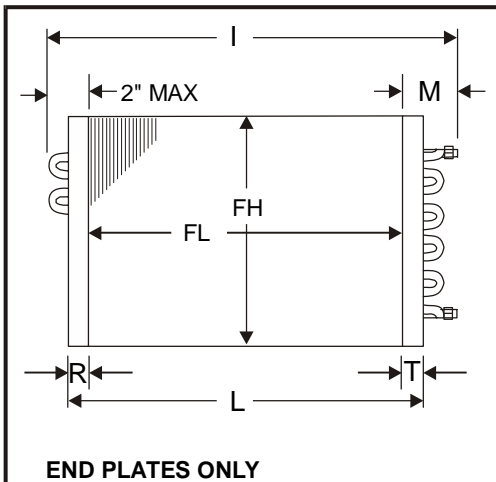

GENERAL NOTES

1. Mounting holes are optional for Fully Flanged and End Plates Only. 0.375" diameter holes on 6" centers from the centerline of the fin height and finned length are typical for all flanges. Not available when S < 0.75".
2. All dimensions are in inches.
3. The water should enter the coil through the lower connection for proper fluid flow.
4. Intermediate tube supports are fabricated from heavy gauge stock and supplied per the chart below.

Finned Length (FL)	Tube Supports
≤ 48	0
> 48 ≤ 96	1